

1 Connect displays

With Brio powered off, connect a touch display to **Output A** (DisplayPort connector) and connect the USB cable from the display to a blue USB port. Optionally, connect a second display to **Output B** (DisplayPort) and to a blue USB port. Set the second display to the right of the first display.

i A multi-touch display is required for the touch interface, whiteboarding, and annotating.

2 Finish connections and power on Brio

• Attach the antenna.

• Connect the speakers to **Line Out**.

i Optionally, audio for a DisplayPort may be selected in System Settings.

• Optionally, connect DVI sources to **Input A** and **Input B**.

• For audio, connect **In A** for the DVI device connected to **Input A** and connect **In B** for the DVI device connected to **Input B**.

• Plug in the power cord and press the power button.

3 Activate your Brio

Go to www.updatebrio.com and complete the activation form.

Download the current software and documents to a USB drive. Insert the USB drive into a USB port on Brio. Connect your device to the Brio WAP (Brio's Wi-Fi) using the information displayed on the Splash Screen (on the Brio outputs).

4 Access the admin page

Open a web browser and enter <http://Brio IP address/admin> (password: admin). From the Software tab in System Settings, use the **Update from USB on Brio** button to update your Brio.

i This may take several minutes to complete.

i If your touch control  is not responding, select the **Toggle touch mapping** button on the General tab in System Settings.

5 Select connection option

Using the information on the Splash Screen, reconnect to the Brio WAP after restart.


Access the admin page (see step 4) to set up a wireless network for Brio. From the Network tab in System Settings, choose the desired wireless network. Connect to the wireless network using the updated information on the Splash Screen.

Optionally, use the Brio WAP to connect devices to Brio.

6 Connect devices

To connect personal devices to Brio and start sharing content, follow the instructions on the Splash Screen, and then browse to the *Brio IP address* or *DNS name* (for example <http://10.10.30.143> or <http://Brio72>) for additional information.

The specific method for connecting a device to Brio depends on the operating system for that device.

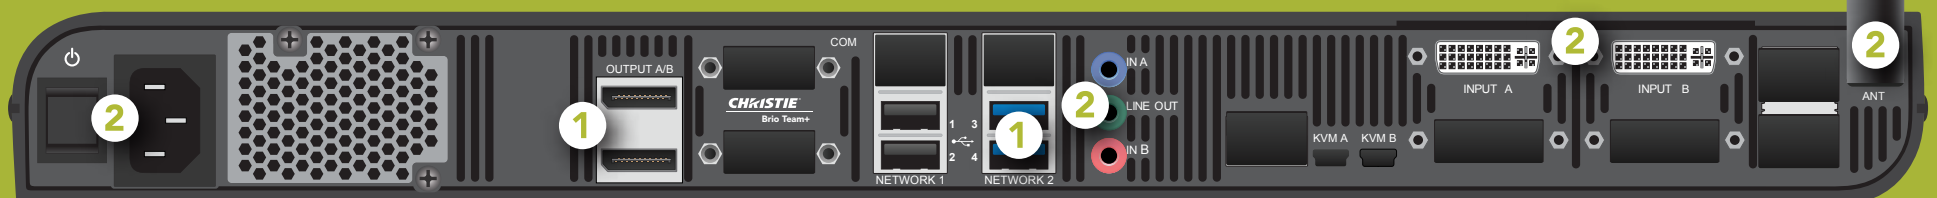


Welcome to Brio Team+

Brio Team+ is a presentation and collaboration solution that makes it easy to share up to five presentations. With a few quick keystrokes or taps on your Mac, PC, iPad, or wired/wireless device, you can share your audio, high definition video, whiteboards, and other information.

Meeting Manager The Meeting Manager is the user interface for Brio. It can be accessed from a touch display or the web. On a touch display, tap the Touch Control.

The Touch Control has three states: whiteboard, annotation on, and annotation off.

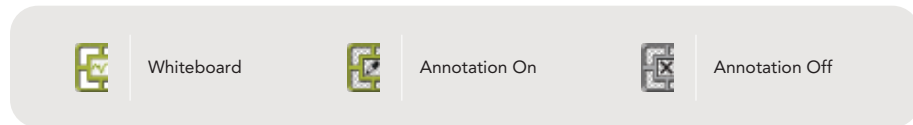

Flick down (touch, move down, and release) on the Touch Control to toggle the state. To browse to the Meeting Manager, connect your browser-capable device to the wireless access point, and enter the *Brio IP address/meeting* in your web browser address field.

Source List The source list contains the following options:

<input checked="" type="checkbox"/> Auto-show	Select to automatically show the source when the source is connected to Brio.
<input checked="" type="checkbox"/> Use numbers	Select to display the source numbers on the sources in the presentation area.
<input checked="" type="checkbox"/> Duplicate #1	Select to duplicate source #1 on both outputs.
	Toggle to show/hide the source.
	Toggle to turn audio on/off for sources.
	Disconnects the source from Brio and removes the source from the list.
	Rearranges the sources in the presentation using drag/drop in the list.

Select primary To change your primary output, use the **Select primary** buttons.

Security Securing Brio prevents unauthorized devices from connecting to it and it also limits access to the Meeting Manager. When Brio is secured, the password must be shared with users who need to view the Meeting Manager or share sources in a meeting.

When a secure session is started or ended, all sources (except DVI sources) are disconnected.

On a touch display, tap

From the web Meeting Manager, click **Security**.

Whiteboarding/Annotating Whiteboarding and annotating require a touch display.

From a touch display, tap the Touch Control to open the menu. Tap the annotation icon to toggle to whiteboard.

From the web Meeting Manager, click the start button

Pen / Eraser / Pen thickness - Sm / Md / Lg / Annotation Mode / Load sketch

Color palette - 7 (of 10)

Undo / Redo / Color palette - 3 (of 10) / Clear sketch / Screenshot



Connect Sources From your browser, select *Help --> How to Connect* and follow the steps for your operating system.

Learn More This is a Quick Start Guide. See the Brio User Manual (020-101758) for more details.

Technical Support Contact Christie Technical Support at +1-519-744-7986.