

DHD670-E/DWU670-E

Corporate AV
Government
Higher education
Houses of worship
Large venue

Lens sold separately

Exceptional images, performance and value.

Best suited for mid- to large-sized boardrooms, breakout rooms, churches and classrooms, the Christie DHD670-E (5800 ANSI lumens/6400 center lumens) and Christie DWU670-E (6000 ANSI lumens/6500 center lumens) provide exceptional brightness and image quality. These new 1-chip DLP® models offer HD (1920x1080) or WUXGA (1920x1200) resolutions in a compact chassis, along with reliable, long-life performance – all backed by Christie's industry-leading warranties, service and support.

This dual lamp platform operates in single or dual lamp modes, and can produce higher lumen levels in a single lamp than other dual lamp projectors. The dust-sealed, filter-free design prevents dust and dirt from affecting the system – ensuring that image quality is maintained and maintenance costs are low. A full suite of optional lenses provides you with more options to meet your application needs.

Power, performance, quality, these new Christie 1-chip DLP® projectors provide extra value at no extra cost.

CHRISTIE®

		DHD670-E	DWU670-E
Image	brightness	<ul style="list-style-type: none"> High brightness color wheel (RGBCYW) <ul style="list-style-type: none"> Dual lamp: 5800 ANSI lumens (6400 center lumens) Single lamp: 3850 ANSI lumens (4250 center lumens) Optional rich color wheel (RGBCYM) <ul style="list-style-type: none"> Dual lamp: 3850 ANSI lumens (4250 center lumens) Single lamp: 2550 ANSI lumens (2800 center lumens) 	<ul style="list-style-type: none"> High brightness color wheel (RGBCYW) <ul style="list-style-type: none"> Dual lamp: 6000 ANSI lumens (6500 center lumens) Single lamp: 4000 ANSI lumens (4400 center lumens) Optional rich color wheel (RGBCYM) <ul style="list-style-type: none"> Dual lamp: 4000 ANSI lumens (4400 center lumens) Single lamp: 2700 ANSI lumens (3000 center lumens)
	contrast	• 5000:1 (full on/off) ¹ 150:1 minimum ANSI	
Display technology	type	• 1-chip 0.65" DMD	
	native resolution	• HD (1920 x 1080) 16:9	• WUXGA (1920 x 1200) 16:10
Lamp	type	• Dual 330W P-VIP [®] Osram	
	estimated life	<ul style="list-style-type: none"> 1500 hrs max power (3000 hrs lamp sequential mode) 2000 hrs eco mode (4000 hrs lamp sequential mode) 	
Input	signals	<ul style="list-style-type: none"> HDTV formats VGA through to WUXGA (1920 x 1200) Horizontal and vertical scaling while maintaining aspect ratio, all inputs 	
	pixel clock	• 162 MHz	
	scan rates	• Horizontal: 15-100kHz • Vertical: 24-85Hz	
Inputs/ outputs, control and networking	inputs	<ul style="list-style-type: none"> Built-in backlit keypad • One RS-232 port • On-board connectivity (RJ45) • One USB port (Type B) – for SW upgrades • One composite video • One S-video • Two HDMI (version 1.3v) • One YPbPr In (Component Video) • RGBHV via 5 BNC • Two VESA inputs for RGBHV • Accepts all current HDTV/DTV formats • Supports DVI input using the HDMI to DVI adapter • One VESA output loop-through to monitor 	
Optical system	lens mount	<ul style="list-style-type: none"> Motorized horizontal and vertical lens offset Motorized zoom and focus adjustment • User replaceable lenses 	
Installation		• 360 degree installation for horizontal, ceiling and vertical positions	
Illumination		• Dust sealed, 1-chip DMD light engine • Motorized iris • Built-in shutter	
Optional lenses	fixed	• 0.8:1 ²	
	zoom	• 1.2-1.5:1 • 1.5-2.0:1 • 2.0-4.0:1 • 4.0-7.0:1	
	offsets	<ul style="list-style-type: none"> +134% vertical (HD – 720 pixels)/ -40% vertical (HD – 240 pixels) ±20% horizontal (±192pixels) 	<ul style="list-style-type: none"> +120% vertical (WU – 720 pixels)/ -40% vertical (WU – 240 pixels) ±20% horizontal (±192pixels)
Accessories	standard	<ul style="list-style-type: none"> High brightness color wheel (RGBCYW) IR remote (w/batteries) • Locking HDMI to DVI adapter 	
	optional	• Rich color wheel (RGBCMY) • Ceiling mount	
Enhanced feature sets		<ul style="list-style-type: none"> No filters required • Dynamic aperture • PiP/PbP • Lamp auto relay feature User-replaceable color wheels • Optimized single lamp operation for maximum brightness • User-accessible lamp change from top of projector • Single lamp module usable in any lamp position • Energy saving standby mode • Menus in nine languages High altitude mode • 360 degree operation • Ceiling mount adjustments 	
Power requirements	operating voltage	• 100-240 VAC @ 50/60Hz	
	operating current	• 10.5A @ 100 VAC	
	power consumption	• 1050W maximum • 835W eco mode	
	dissipation	• Stand-by eco mode power <0.2W ³	
Dimensions	size	• (LxWxH): 20.9 x 18.0 x 8.3" (532 x 456 x 210mm) excluding feet	
	shipping size	• (LxWxH): 23.3 x 38.0 x 15.4" (591 x 965 x 390mm)	
	weight	• 43lbs (19.5kg)	
	shipping weight	• 58lbs (26.3kg)	
Operating environment		• Temperature: 40-95°F (5-35°C) • Humidity: 5-80% non-condensing	
Regulatory approvals		<ul style="list-style-type: none"> This product conforms to the following regulations related to product safety, environmental requirements and electromagnetic compatibility (EMC): FCC Part 15, Subpart B Class A • EN55024/CISPR24 Class A • UL 60950-1 CAN/CSA-C22.2 No 60950-1 • IEC 60950-1 • 2002/95/EC RoHS • 2002/96/EC (WEEE) 	
Limited warranty		<ul style="list-style-type: none"> 3 years parts and labor (including light engine) Contact an authorized Christie representative for full details of our limited warranty 	

¹ In dynamic contrast mode. ² No offset


³ In this mode, network functions and serial command functions not operable unless projector is turned on.



▲ When greater color accuracy is required, an optional rich color wheel gives you the ability to change the standard high brightness color wheel.



▲ Full suite of optional lenses provides installation flexibility.

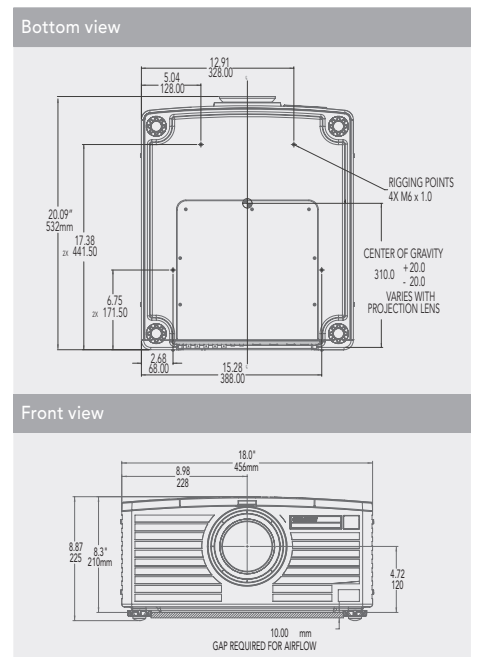

Corporate offices

Christie Digital Systems USA, Inc
USA – Cypress
ph: 714 236 8610

Christie Digital Systems Canada Inc.
Canada – Kitchener
ph: 519 744 8005

Worldwide offices

United Kingdom
ph: +44 (0) 118 977 8000

Germany
ph: +49 2161 664540

France
ph: +33 (0) 1 41 21 44 04

Spain
ph: +34 91 633 9990

Eastern Europe and
Russian Federation
ph: +36 (0) 1 47 48 100

United Arab Emirates
ph: +971 (0) 4 320 6688

India
ph: (080) 41468940

Singapore
ph: +65 6877 8737

China (Shanghai)
ph: +86 21 6278 7708

China (Beijing)
ph: +86 10 6561 0240

Japan (Tokyo)
ph: 81 3 3599 7481

Korea (Seoul)
ph: +82 2 702 1601

Independent sales consultant offices

Italy
ph: +39 (0) 2 9902 1161

South Africa
ph: +27 (0) 317 671 347



For the most current specification information, please visit www.christiedigital.com