

Christie FHD552-X Ultra-narrow bezel 55" LCD display


Technical specifications		Christie FHD552-X
Display technology	screen size (diagonal)	• 55"
	native resolution	• 1920 x 1080
	backlight	• Direct LED
	LED lifespan	• 50,000 hrs (50% brightness)
	pixel pitch	• 0.63 x 0.63mm
	bezel size	• 1.2mm (bottom/right) • 2.3mm (top/left) nominal
	brightness	• 500 nits (cd/m ²) maximum
	contrast ratio (full field)	• 1400:1
	viewing angle (CR 10:1)	• 178° h/v
	refresh rate	• 50/60Hz
	response time	• 12 ms
	peak white color temperature	• 10,000K
	color space (CIE 1931)	• 72%
display colors	• 1.06 billion	
Signal	inputs	• DisplayPort • HDMI (HDCP) x 2 • DVI (HDCP) • Component • VGA • S-video • Composite
	outputs	• DVI (HDCP) • VGA • Composite
Control	inputs	• RS-232 • RS-485
	outputs	• RS-485
Power	input rating	• 100-240 VAC @ 50/60Hz; 2.5A
	power consumption	• 170W typical • 240W maximum • ≤0.5W standby
Environment	operating temperature	• 41-95°F (5-35°C)
	operating humidity	• 20-90% non-condensing
	storage temperature	• -4-140°F (-20-60°C)
Physical	Dimensions (WxHxD)	
	panel only	• 47.78 x 26.94 x 3.19" (1213.4 x 684.2 x 81.1mm)
	panel with quick access mount ¹	• 47.78 x 26.94 x 6.26-7.02" (1213.4 x 684.2 x 159.1-178.1mm)
	panel with thin profile mount ¹	• 47.78 x 26.94 x 3.88" (1213.4 x 684.2 x 98.6mm)
	panel mount locations	• VESA standard (WxH) 600 x 400mm
Runtime	• Designed for 24/7 operation ² , featuring a reliable power supply and cooling system	
Features	• Anti-glare coating • Full HD resolution • Landscape or portrait orientation	
	• Front-accessible mount • Stackable frames and pedestals • Advanced cooling design	
	• High energy efficiency with ≤0.5W standby • Plug and Play (DDC2B) • Bezel compensation option • Image Retention Frame Motion (IRFM) mode • Auto Scan source selection	
	• Aspect-ratio control • Zoom • Picture-in-Picture (PiP) • Advanced image settings	
	• Configurable power on delay • Sleep timer • Single DVI input can be shared by up to 3x3 panels • Control up to 100 panels through single RS-232 and Video Wall Toolbox 2.0 software on a remote PC • Auto setup for single-input video wall	
	• Control each panel with on-screen display (OSD) using infrared (IR) remote control	
	• Panel ships with remote control with IR extender, DVI cable, Ethernet cable (RS-485), RS-232 cable; regional power cord available separately	
	• Wall mounts: ML10 for landscape, MP10 for portrait, spacer kit available - thin wall mount available from third party	
	• Frame and pedestal for turnkey structural solution	
	• Three years parts and labor limited warranty	
Warranty	• Contact an authorized Christie representative for full details of our limited warranty	

¹ Christie offers a quick access mount for easy servicing and alignment. The above dimensions and weight with thin profile mount are based on Peerless DS-VW650. If using a third party mount, please check with the supplier for exact specifications.


² Avoid static images for extended periods. Refer to the user manual for additional runtime guidance.

Content and operating conditions can affect the useful life of the product. Please refer to the product user manual and Christie Operating Guidelines for Flat Panels, available at www.christieemea.com


Front of panel

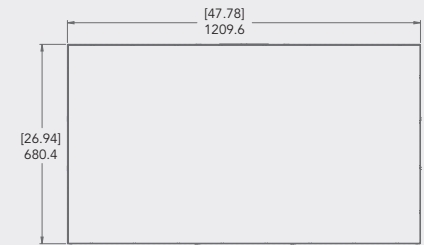


Minimal bezels

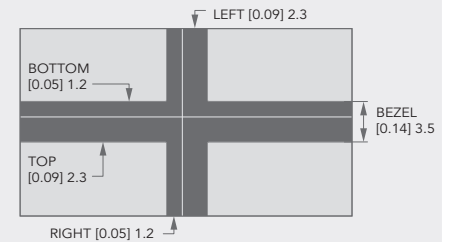


Back of panel

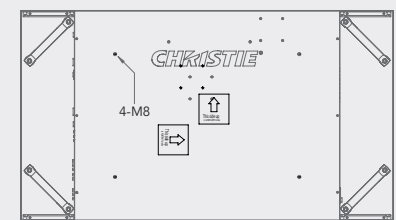

Quick access mount



Thin profile mount



Complies with U.S. ADA regulations for installed depth under 4" ▲

United Kingdom
Branch & EMEA
Head Office
ViewPoint
200 Ashville Way
Wokingham
Berkshire, U.K.
RG41 2PL
PH: +44 (0) 118 977 8000

Middle East
Light Industrial Unit (LIU-17)
Nad Al Shibba
Sheikh Mohammed Bin Zayed Road
Dubai Silicon Oasis
PO Box: 293762
Dubai - U.A.E
PH: +971 (0) 4 503 6800

Africa
Unit C3
Northlands Deco Park
New Market Road
Northriding
Randburg
2164
Johannesburg
Gauteng
South Africa
PH: +27 71 335 8667

Other EMEA offices

Germany
Branch Office
PH: +49 2161 566 200

France
Branch Office
PH: +33 (0) 1 41 21 44 04

Eastern Europe
Representative Office
PH: +36 (0)1 47 48 138

Spain
Branch Office
PH: +34 91 633 9990

Italy
Independent Sales Consultant Office
PH: +39 (0) 2 9902 1161

Russia
Independent Sales Consultant Office
PH: +7 (495) 930-8961



For the most current specification information, please visit www.christieemea.com

Copyright 2016 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Christie Digital Systems Canada Inc.'s management system is registered to ISO 9001 and ISO 14001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice. Printed in Canada on recycled paper. 3999 Jan 15

CHRISTIE