


## CP2215

Small-screen auditoriums | Boutique cinema | Post production | Screening rooms

Lowest upfront investment for DCI-compliant cinema on screens up to 58 feet wide



### Key features:

- › **Easy to operate** – touch panel, or web-based GUI. Intelligent lens system (ILS™) for fast-set-up
- › **Easy to install** – lightweight all-in-one chassis for flexible mounting
- › **Easy to maintain** – rear access lamp change
- › **Affordable performance** – Christie Xenolite long-life, lower power-consumption lamps
- › **Reliability** – split power operation for use with UPS
- › **Compatibility** – works with Christie and 3rd-party IMBs, accessories and lenses

### CHRISTIE XENOLITE

Industry's longest warranted and most reliable lamps - 99.999% uptime

### DIGITAL CINEMA CONFIGURATOR

Help find the right lamp for your projector on our website



## Specifications


## Christie CP2215

Brightness <sup>1</sup>	nominal	• 15,000 lumens
	screen size	• 58' screen <sup>1</sup>
	lamp	<ul style="list-style-type: none"> <li>• 1.4kW (CDXL-14M) 003-003066-01</li> <li>• 1.6kW (CDXL-16M) 003-003900-01</li> <li>• 1.8kW (CDXL-18SD) 003-0027420-01</li> <li>• 2.0kW (CDXL-20SD) 003-001976-01</li> <li>• 2.3kW (CDXL-23S) 003-004769-01</li> </ul>
Contrast ratio		• 2000:1 full field on/off
Supported frame rates		<ul style="list-style-type: none"> <li>• 2D up to 120 fps</li> <li>• 3D up to 60 fps/eye</li> </ul>
Digital micromirror device		<ul style="list-style-type: none"> <li>• 0.98" 2K 3-chip DMD DLP Cinema®</li> <li>• 2048 x 1080 pixels (2K)</li> </ul>
Number of colors		• 35.2 trillion
Lens mount configuration		• Fully motorized Intelligent Lens System (ILS™)
Lenses		• 1.05:1 / 1.20-1.75:1 / 1.39-1.90:1 / 1.50-2.20:1 / 1.75-2.40:1 / 1.90-3.0:1 / 2.40-3.90:1
Power input requirements		<ul style="list-style-type: none"> <li>• Main input: 200-240VAC 50-60Hz, 16A max</li> <li>• UPS input: 100-240VAC @ 50-60Hz, 10A max</li> </ul>
Power consumption		• 3200W max
Lamp power supply		• 0.7kW - 2.3kW low-ripple switch mode power supply
Weight		• As installed: 122lbs max (55kg)
Dimensions (LxWxH)		• 27 x 26 x 15" (687 x 665 x 395mm)
Accessories		<ul style="list-style-type: none"> <li>• 90 degree extraction duct adapter</li> <li>• Rack mount stand</li> <li>• Link Decryptor</li> </ul>


<sup>1</sup> Maximum screen size depends upon various factors such as screen gain, lamp age, geometry, etc. Consult your Christie representative for detailed analysis. Measured at screen center.

Supports 3rd party IMB models from Dolby, GDC and others. Please contact Christie for updated compatibility list.


## Front view

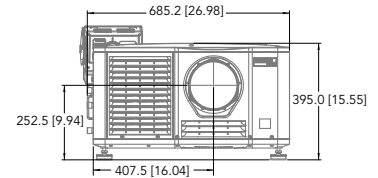


## Side view

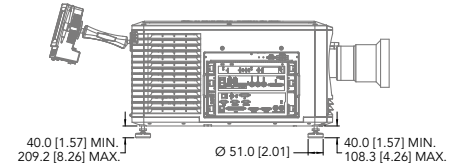

## Top view

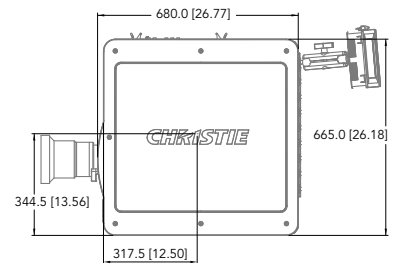

## Side view

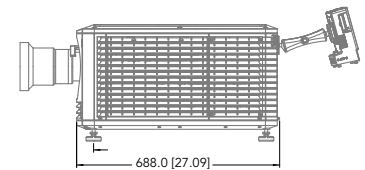

### Corporate offices

Christie Digital Systems USA, Inc.  
Cypress  
PH: +1 714-236-8610

Christie Digital Systems Canada Inc.  
Kitchener  
PH: +1 519-744-8005

### Worldwide offices

Australia  
PH: +61 (0) 7 3624 4888

Brazil  
PH: +55 11 3181-2952

China (Beijing)  
PH: +86 10 6561 0240

China (Shanghai)  
PH: +86 21 6030 0500

China (Shenzhen)  
PH: + 86 755 3680 7000

Colombia  
PH: +57 (315) 652-9620

Germany  
PH: +49 221 99 512-0

India  
PH: +91 (080) 6708 9999

Mexico  
PH: +52 (55) 4744-1791

Singapore  
PH: +65 6877 8737

South Korea  
PH: +82 2 702 1601

Spain  
PH: +34 (0) 91 633 99 90

United Arab Emirates  
PH: +971 (0) 4 503 6800

United Kingdom  
PH: +44 (0) 118 977 8000

United States (Arizona)  
PH: +1 602-943-5700

United States (Texas)  
PH: +1 469-757-4420

For the most current specification information, please visit [christiedigital.com](http://christiedigital.com)

Copyright 2023 Christie Digital Systems USA, Inc. All rights reserved. Our centers of excellence for manufacturing in Kitchener, Ontario, Canada and in Shenzhen, China are ISO 9001:2015 Quality Management System-certified. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. "Christie" is a trademark of Christie Digital Systems USA, Inc., registered in the United States of America and certain other countries. DLP® and the DLP logo are registered trademarks of Texas Instruments. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.  
CD4192-CP2215-Datasheet-Jan-24-EN-US

