


CP4230

Large-screen auditoriums | Event cinema | Post production

Lowest upfront investment for 4K DCI-compliant cinema on screens up to 87 feet wide



Key features:

- › **Easy to operate** – touch panel, or web-based GUI. Intelligent lens system (ILS™) for fast-set-up
- › **Affordable performance** – Christie Xenolite long-life, lower power-consumption lamps
- › **Flexibility of brightness** – Operates with standard 2kW up to high performance 6kW lamps
- › **Brightest picture** – delivers the highest lamp brightness for the longest duration
- › **Compatibility** – works with Christie and 3rd-party IMBs, accessories and lenses
- › **Reliability** – split power operation for use with UPS

CHRISTIE XENOLITE

Industry's longest warranted and most reliable lamps - 99.999% uptime

DIGITAL CINEMA CONFIGURATOR

Help find the right lamp for your projector on our website



Specifications


Christie CP4230

Brightness ¹	nominal	• 34,000 lumens
	screen size	• 87' screen ¹
	lamp	<ul style="list-style-type: none"> • 2.0kW (CDXL-20) 003-000598-01 • 3.0kW (CDXL-30) 003-000599-01 • 4.0kW (CDXL-45) 003-000600-XX • 6.0kW (CDXL-60) 003-000601-XX • 6.0kW (CDXL-60UP) 003-006912-01
Contrast ratio		• 2000:1 full field on/off
Supported frame rates		<ul style="list-style-type: none"> • 2D 2K up to 120 fps • 3D 2K up to 60 fps/eye
Digital micromirror device		<ul style="list-style-type: none"> • 1.4" Enhanced 4K 3-chip DMD DLP Cinema® • 4096 x 2160 pixels
Number of colors		• 35.2 trillion
Lens mount configuration		• Fully motorized Intelligent Lens System (ILS™)
Lenses		• HB and HC: 1.0:1 (HB lens) / 1.25-1.83:1 / 1.45-2.05:1 / 1.60-2.40:1 / 1.80-3.0:1 / 2.15-3.60:1 / 3.0-4.30:1 (HB lens)
Power input requirements		• Main Input (Head Only): 200-240VAC @ 50-60Hz 6A max
Power consumption		• 8800W max
Lamp power supply		• 7.0 kW low-ripple switch mode power supply
Weight		<ul style="list-style-type: none"> • As installed: 245lbs max (111kg) • Lamp power supply: 70lbs max (32kg)
Dimensions (LxWxH)		• 47.2 x 25.4 x 18.9" (1199 x 644 x 480mm)
Accessories		<ul style="list-style-type: none"> • Lamp power supply kit 7.5m • Lamp power supply kit 15m • Lamp power supply kit 30m • Rack mount stand


¹ Maximum screen size depends upon various factors such as screen gain, lamp age, geometry, etc. Consult your Christie representative for detailed analysis. Measured at screen center.

Supports 3rd party IMB models from Dolby, GDC and others. Please contact Christie for updated compatibility list.


Front view




Side view

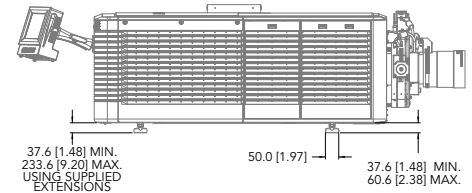

Top view

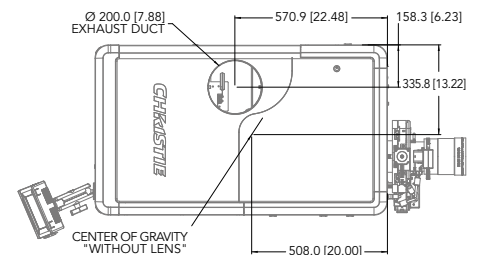

Side view

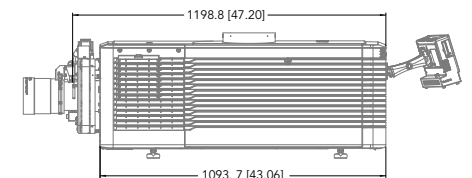

Corporate offices

Worldwide offices

Christie Digital Systems USA, Inc. Cypress PH: +1 714-236-8610	Australia PH: +61 (0) 7 3624 4888	China (Shenzhen) PH: + 86 755 3680 7000	Mexico PH: +52 (55) 4744-1791	United Arab Emirates PH: +971 (0) 4 503 6800
Christie Digital Systems Canada Inc. Kitchener PH: +1 519-744-8005	Brazil PH: +55 11 3181-2952	Colombia PH: +57 (315) 652-9620	Singapore PH: +65 6877 8737	United Kingdom PH: +44 (0) 118 977 8000
	China (Beijing) PH: +86 10 6561 0240	Germany PH: +49 221 99 512-0	South Korea PH: +82 2 702 1601	United States (Arizona) PH: +1 602-943-5700
	China (Shanghai) PH: +86 21 6030 0500	India PH: +91 (080) 6708 9999	Spain PH: +34 (0) 91 633 99 90	United States (Texas) PH: +1 469-757-4420

For the most current specification information, please visit christiedigital.com

Copyright 2023 Christie Digital Systems USA, Inc. All rights reserved. Our centers of excellence for manufacturing in Kitchener, Ontario, Canada and in Shenzhen, China are ISO 9001:2015 Quality Management System-certified. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. "Christie" is a trademark of Christie Digital Systems USA, Inc., registered in the United States of America and certain other countries. DLP® and the DLP logo are registered trademarks of Texas Instruments. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.
CD3904-CINE0099-CP4230-Datasheet-Feb-24-EN-US

