
## Christie FHD553-XU

## Ultra-narrow bezel 55" LCD display

Technical sp	ecifications	Christie FHD553-XU		
Display	screen size (diagonal)	• 55"		
technology	native resolution	• 1920 x 1080		
	backlight	Direct-lit LED		
	LED lifespan	• 50,000 hrs (50% brightness)		
	pixel pitch	• 0.63 x 0.63mm		
	bezel size	3.5mm combined nominal bezel to bezel		
	brightness	• 500 nits (cd/m²) typical		
	contrast ratio (full field)	• 1400:1		
	viewing angle (CR 10:1)	• 178° h/v		
	refresh rate	• 50/60Hz		
	response time	• 8 ms		
	color space (CIE 1931)	• 72%		
	display colors	• 1.07 billion, 10 bit		
Signal	inputs	DisplayPort (Ver 1.2, HDCP) • 2 x HDMI (Ver 1.4, HDCP)     DVI-D (HDCP) • VGA		
	outputs	DisplayPort (daisy chains DisplayPort, HDMI, and DVI inputs up to 16 panels from one source). Built-in processing supports scaling video walls up to 10x10		
Control	inputs	RS-232 via D-Sub9 • RJ-45 LAN • Keypad • IR window		
	•	• IR wire extender		
	outputs <sup>2</sup>	RJ-45 for control looping		
Power	input rating	• 100-240 VAC @ 50/60Hz		
	power consumption	• 165W typical • 220W maximum • ≤0.5W standby		
Environment	operating temperature	• 41-95°F (5-35°C)		
	operating humidity	• 20-90% non-condensing		
	storage temperature	• -4-140°F (-20-60°C)		
Physical		Dimensions (WxHxD)	Weight	
	panel only (without handles)	• 47.78 x 26.94 x 3.88" (1213.5 x 684.3 x 98.5mm)	• 66lbs (30kg)	
	panel mount locations	VESA standard (WxH) 400 x 400mm, M8		
Runtime	Designed for 24/7 operation <sup>1</sup> , featuring a reliable power supply and cooling system			
Features	Commercial-grade LCD with LED backlight • Standard size OPS Christie® Phoenix® EP supported • Built-in processing supports video walls up to 10x10 Multi-stream transport supported across up to four panels (UHD at 60 fps) Anti-glare coating • SNMP for monitoring • Remote and button lock • Pixel Orbiting (IRFM) Bezel compensation • Kensington lock • Staggered power-up			
Accessories	Panel ships with DisplayPort cable, IR remote control, external IR receiver, power cable, control daisy chain cable, rear alignment brackets, user manual     Optional wall mount: Christie MPL15 6-axis mount for portrait or landscape			
Warranty	Three years parts and labor limited warranty  Contact an authorized Christie representative for full details of our limited warranty			

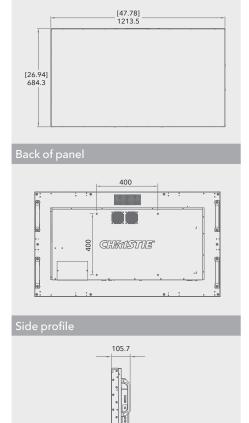

Content and operating conditions can affect the useful life of the product. Please refer to the product documentation and Christie Operating Guidelines for Flat Panels, available at www.christiedigital.com

Corporate offices	Worldwide office

Christie Digital Systems USA, Inc. Cypress ph: 714 236 8610 Christie Digital Systems Canada Inc. Kitchener ph: 519 744 8005

Brazil
ph: +55 (11) 2548 4753
China (Beijing)
ph: +86 10 6561 0240
China (Shanghai)
ph: +86 21 6278 7708

Columbia ph: +57 (318) 447 3179 Eastern Europe ph: +36 (0)1 47 48 138

ph: +61 (0) 7 3624 4888

France ph: +33 (0) 1 41 21 44 04 Germany (Cologne) ph: +49 221 99 512-0

Germany (Moechengladbach) ph: +49 2161 566200 India ph: +91 (080) 6708 9999

ph: +81 3 3599 7481 Mexico ph: +52 55 4744 1790 Republic of South Africa ph: +27 11 251 0000

Singapore ph: +65 6877 8737 South Korea ph: +82 2 702 1601

Spain ph: +34 91 633 9990 United Arab Emirates ph: +971 (0) 4 503 6800 United Kingdom ph: +44 (0) 118 977 8000 United States (Arizona) ph: 602 943 5700 United States (New York) ph: 646 779 2014

Independent sales consultant offices

Italy ph: +39 (0) 2 9902 1161 Russia ph: +7 (495) 930 8961







(3.88) 98.5

<sup>&</sup>lt;sup>1</sup> Avoid static images for extended periods. Refer to the product documentation for additional guidance.

<sup>&</sup>lt;sup>2</sup> Does not include OPS power draw.