
Christie FHQ552-T

Affordable, interactive 55" LCD display

| Technical s | pecifications | Christie FHQ552-T |
|-----------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display technology | screen size (diagonal) | •55" |
| | native resolution | • 3840 x 2160 (16:9) |
| | backlight | • Edge-lit LED |
| | LED lifespan | • 30,000 hrs (50% brightness) |
| | display orientation | • Landscape |
| | pixel pitch | • 0.315 x 0.315mm |
| | nominal bezel size | • 35mm |
| | brightness | • 385 nits (cd/m²) typical |
| | contrast ratio (full field) | • 1000:1 typical |
| | viewing angle (CR 10:1) | • 178° h/v |
| | refresh rate | • 120Hz |
| | response time | • 8ms |
| | color space (CIE 1931) | •72% |
| | display colors | • 10 bit • 1.06 billion |
| Signal | inputs | • HDMI 1.4b x 4 • DisplayPort 1.2 • VGA • USB type A (firmware updates) • USB 2.0 type B (Touch control) • IR • OPS-HDMI 1.4b • OPS-DP 1.1a • AC • Infrared Receiver • Audio 3.5mm • 6 key control buttons |
| | outputs | Audio 3.5mm |
| Control | inputs | RS-232 via extension cable (included) |
| Power | input rating | • 100-240 VAC @ 50/60Hz |
| | power consumption | Without OPS: 160W maximum; 110 typical • With OPS: 280W maximum; 125 typical • >=0.5W standby |
| Environment | operating temperature | • 32-104°F (0-40°C) |
| | operating humidity | • 20-80% RH non-condensing |
| | storage temperature | • 4-140°F (-20-60°C) |
| Physical | size | • (WxHxD): 51.75 x 30.85 x 3.94" (1314.5 x 783.6 x 100mm) • (D): 3.39" (86.1mm) without handle |
| | weight | • 94.8lbs (43kg) |
| | panel mount locations | VESA standard (WxH) 400 x 400mm |
| Runtime | | Designed for 16 hour operation featuring a reliable power supply and cooling system¹ |
| Features | | Open Pluggable Specification (OPS) slot • Anti-glare coating • UHD resolution (3840 x 2160 @120Hz) • Landscape only 10 point multi-touch² • Plug and Play (DDC2B) • Motion Estimation Motion Compensation (MEMC) supported • Control with on screen display (OSD) using infrared (IR) remote control • Sleep mode • Built in 10W x 2 speakers • Multi-window options including: Dual, Quad (allowable resolution: ≤ 1080p @ 60Hz) |
| Accessories | | • Panel ships with remote control • External IR receiver • RS-232 cable • USB cable • Quick start guide and multi-language user manual CD |
| Warranty | | • Three years parts and labor limited warranty • Contact an authorized Christie representative for full details of our limited warranty |

¹ Avoid static images for extended periods. Refer to the user manual for additional runtime guidelines.

² Requires Windows 7 Home Premium or higher. MacOS or Linux requires drivers, and supports single touch only.
Content and operating conditions can affect the useful life of the product. Please refer to the product user manual and Christie Operating Guidelines for Flat Panels, available at www.christiedigital.com

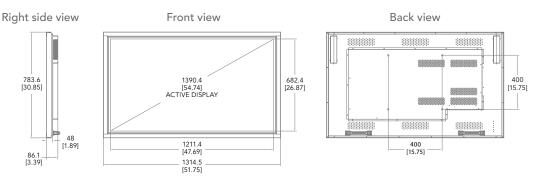

Corporate offices Worldwide offices

Christie Digital Systems USA, Inc. Cypress ph: 714 236 8610

Christie Digital Systems Canada Inc. Kitchener ph: 519 744 8005 Australia ph: +61 (0) 7 3624 4888 Brazil ph: +55 (11) 2548 4753 China (Beijing) ph: +86 10 6561 0240

China (Shanghai) ph: +86 21 6278 7708 France ph: +33 (0) 1 41 21 44 04 Germany ph: +49 2161 664540 India

ph: +91 (080) 6708 9999 Japan (Tokyo) ph: 81 3 3599 7481 Korea (Seoul) ph: +82 2 702 1601

Mexico ph: +52 55-4744-1790 Republic of South Africa ph: +27 (0) 11 510 0094

Russian Federation and Eastern Europe ph: +36 (0) 1 47 48 100 Singapore ph: +65 6877 8737

Spain ph: +34 91 633 9990

United Arab Emirates ph: +971 4 3206688

United Kingdom ph: +44 (0) 118 977 8000

United States (Arizona) ph: 602 943 5700

United States (New York) ph: 646 779 2014

Independent sales consultant offices

Italy ph: +39 (0) 2 9902 1161

