

# Christie Link transmitter



Simplify your setup, increase system reliability and go further with Christie Link. Now you can easily send high-bandwidth signals (up to 4K 120Hz) over long distances (up to 6.2 miles / 10 km) directly into the projector on a single-fiber cable without latency or compression.

## Specifications

### Output – Single- or multi-mode fiber types

Designed to work with any QSFP+ module, Christie Link can use the following optical fibers:

- Single-mode - 1310nm, or
- Multi-mode - 850nm, usually referred to as OM3 or OM4\*

\*Note: Christie doesn't carry fiber cables

QSFP+ modules should be marked with the light wavelength, so you can determine which fiber type to use.

While you can use any QSFP+ module, Christie offers a pair of QSFP+ modules that have been tested by our engineers to match Christie Link transmitter performance, helping ensure both quality and reliability.

Christie Link transmitters:

- Are designed to work perfectly with Christie Boxer projectors. The ability to manage EDIDs throughout the entire system helps ensure reliable performance.
- Simplify installation by eliminating a potential point of failure and not requiring a converter at the projector end.
- Allow each transmitter to be networked so you can configure and monitor the system's status without having to physically reach the device, and view both the projector it's connected to and the status of that connection.

The following single-link fiber cable is compatible with our QSFP+ modules:

Fiber type	Connector 1 & 2	Fiber mode	Maximum distance
Single-mode, duplex, 1310nm	Type LC (blue color), polish UPC	9/125 µm	6.2 miles / 10 km

## Inputs

### Connections


- 2 x DisplayPort 1.2 inputs - Supports HDCP 1.4
- 2 x HDMI 2.0 inputs - Supports both HDCP 1.4 and HDCP 2.2

### Configurations

- 1-port, 2-port, dual input 3D

	Format	Frame rate (Hz)	Color sampling	Bit-depth	Notes
DisplayPort	(DP1.2)				Supports HDCP 1.4
4K	3840 x 2160	24 25 30 50 60	RGB/4:4:4	8/10bpc	
	4096 x 2160				
HD	1280 x 720	24 25 30 50 60	RGB/4:4:4	8/10/12bpc	
	1920 x 1080				
	2048 x 1080				

# Christie Link transmitter

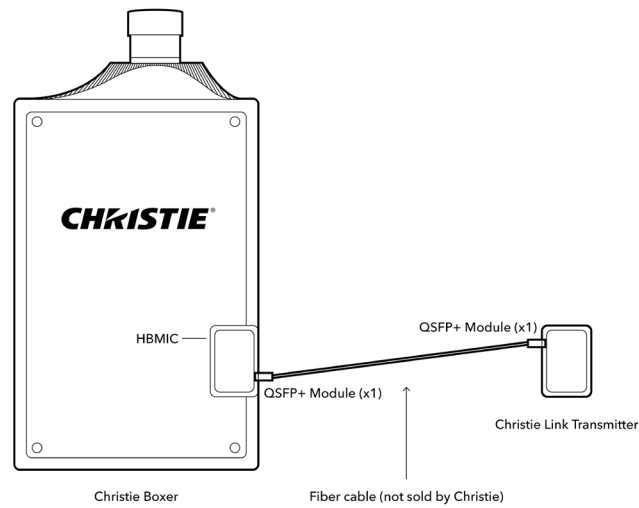

## Inputs *(continued)*

	Format	Frame rate (Hz)	Color sampling	Bit-depth	Notes
<b>HDMI</b>	<b>(HDMI 2.0)</b>				<i>Supports HDCP 1.4 &amp; 2.2</i>
<b>4K</b>	3840 x 2160	24 25 30	RGB/4:4:4/4:2:2	8/10/12bpc	4:2:2 12-bit only
		50 60	RGB/4:4:4	8bpc	
		50 60	RGB 4:2:2/4:2:0	8/10/12bpc	4:2:2 12-bit only
	4096 x 2160	24 25 30	RGB/4:4:4/4:2:2	8/10/12bpc	4:2:2 12-bit only
		50 60	RGB/4:4:4	8bpc	
		50 60	RGB 4:2:2/4:2:0	8/10/12bpc	4:2:2 12-bit only
<b>HD</b>	1280 x 720	24 25 30 50 60	RGB/4:4:4/4:2:2	8/10/12bpc	
	1920 x 1080i	50 60			
	1920 x 1080	24 25 30 50 60			
	2048 x 1080	24 25 30 50 60			

### Communications

- RJ-45
- 10/100/1000 Ethernet connection for web, SNMP and serial API
- Supports DHCP
- USB Type A - upgrades and diagnostic file retrieval
- Built-in keypad
- Panel display screen

### Physical specifications

- Size (L x W x H): 285.5mm x 220.2mm x 42.8mm
- Weight: 1.5kg

### Power requirements

- Voltage: 100-240 VAC
- Current: 1.0 A
- Line frequency: 50/60Hz
- Christie Link module connector type: IEC60320-1 C14

### Operating environment

- Ambient operating temperature: 5 to 35°C (41 to 95°F) up to 1500 feet
- Humidity (non-condensing): 10 to 80%
- Operating altitude: 10,000 feet maximum at 5 to 25°C ambient

#### Corporate offices

Christie Digital Systems USA, Inc.  
Cypress  
ph: 714 236 8610

Christie Digital Systems Canada Inc.  
Kitchener  
ph: 519 744 8005

#### Worldwide offices

Australia  
ph: +61 (0) 7 3624 4888

Brazil  
ph: +55 (11) 2548 4753

China (Beijing)  
ph: +86 10 6561 0240

China (Shanghai)  
ph: +86 21 6278 7708

France  
ph: +33 (0) 1 41 21 44 04

Germany  
ph: +49 2161 664540

India  
ph: +91 (080) 6708 9999

Japan (Tokyo)  
ph: 81 3 3599 7481

Korea (Seoul)  
ph: +82 2 702 1601

Mexico  
ph: +52 55-4744-1790

Republic of South Africa  
ph: +27 11 251 0000

Russian Federation  
and Eastern Europe  
ph: +36 (0) 1 47 48 100

Singapore  
ph: +65 6877 8737

Spain  
ph: +34 91 633 9990

United Arab Emirates  
ph: +971 (0) 4 503 6800

United Kingdom  
ph: +44 (0) 118 977 8000

United States (Arizona)  
ph: 602 943 5700

United States (New York)  
ph: 646 779 2014

**Independent sales  
consultant offices**

Italy  
ph: +39 (0) 2 9902 1161



ISO 9001  
ISO 14001  
Kitchener, Ontario

For the most current specification information, please visit [www.christiedigital.com](http://www.christiedigital.com)

Copyright 2017 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Christie Digital Systems Canada Inc.'s management system is registered to ISO 9001 and ISO 14001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice. Printed in Canada on recycled paper. Christie Link transmitter specifications | June 2017

**CHRISTIE®**