

# Christie FHD462-X

## Technical specifications

<b>Display technology</b>	screen size (diagonal)	• 46"	
	native resolution	• 1920 x 1080 (16:9)	
	technology	• Commercial-grade LCD	
	backlight	• Direct LED	
	LED lifespan	• 50,000 hrs (50% brightness)	
	display orientation	• Landscape or portrait	
	pixel pitch	• 0.53 x 0.53mm	
	nominal bezel size	• 2.3mm (top/left) • 1.4mm (bottom/right)	
	brightness	• 500 nits (cd/m <sup>2</sup> ) maximum	
	contrast ratio (full field)	• 3500:1	
	viewing angle (CR 10:1)	• 178° h/v	
	refresh rate	• 50/60Hz	
	response time	• 8 ms	
	color space (CIE 1931)	• 72%	
display colors	• 16.7 million		
<b>Signal</b>	inputs	• HDMI x2 • DVI • DisplayPort 1.2 • VGA • Audio L/R • Audio 3.5mm • Infrared extender 3.5mm	
	outputs	• DisplayPort 1.2 • DVI • VGA • Audio 3.5mm	
<b>Control</b>	inputs	• RS-232 • RS-485 • Ethernet	
	outputs	• RS-485	
<b>Power</b>	input rating	• 100-240 VAC @ 50/60Hz; 3A	
	power consumption	• 195W maximum • 130W typical • ≤0.5W standby	
	ENERGY STAR®	• 6.0	
<b>Environmental</b>	operating temperature	• 41°-104°F (5°-40°C) • 75% RH	
	operating humidity	• 20-90% non-condensing	
	storage temperature	• -4°-122°F (-20°-50°C) • 75% RH	
<b>Physical</b>	Dimensions (WxHxD)	<b>Weight</b>	
	panel only	• 40.24 x 22.70 x 3.24" (1022.0 x 576.6 x 82.2mm)	• 49.2lbs (22.3kg)
	panel with quick access mount <sup>1</sup>	• 40.24 x 22.70 x 6.31 - 7.06" (1022.0 x 576.6 x 160.2-179.2mm)	• 97.7lbs (44.3kg)
	panel with thin profile mount <sup>1</sup>	• 40.24 x 22.70 x 3.93" (1022.0 x 576.6 x 99.7mm)	• 62.4lbs (28.3kg)
	panel mount locations	• VESA standard (WxH) 400 x 200mm	
<b>Runtime</b>	• Designed for 24/7 operation <sup>2</sup> , featuring a reliable power supply and cooling system		
<b>Features</b>	• Commercial-grade LCD • Anti-glare coating • Full HD resolution • Landscape or portrait orientation • Front-accessible mount • Advanced cooling design • High energy efficiency with ≤0.5W standby • Plug and Play (DDC2B) • Bezel compensation option • Image Retention Frame Motion (IRFM) mode • Adjustable backlight frequency • Auto Scan source selection • Aspect-ratio control • Zoom • Picture-in-Picture (PiP) • Advanced image settings • Configurable power on delay • Sleep timer • Single UHD input (3840 x 2160) can be displayed on 2x2 array using DisplayPort 1.2 MST loop through • Single input up to 2560 x 1600 can be cropped and scaled to fit up to 10x10 array • Control up to 25 panels through single RS-232, Ethernet, or infrared (IR) remote control • Auto setup for single-input video wall		
<b>Accessories</b>	• Panel ships with remote control, IR extender, DVI cable, Ethernet cable (RS-485) and RS-232 cable • Regional power cord available separately • Quick access wall mounts: ML10 for landscape, MP10 for portrait, spacer kits available • Thin wall mount available from third party		
<b>Warranty</b>	• Three years parts and labor limited warranty • Contact an authorized Christie representative for full details of our limited warranty		

<sup>1</sup> Christie offers a quick access mount for easy servicing and alignment. The above dimensions and weight with thin profile mount are based on Peerless DS-VW650. If using a third party mount, please check with the supplier for exact specifications.

<sup>2</sup> Avoid static images for extended periods. Refer to the user manual for additional runtime guidance.

Content and operating conditions can affect the useful life of the product. Please refer to the product user manual and Christie Operating Guidelines for Flat Panels, available at [www.christiedigital.com](http://www.christiedigital.com)

## Corporate offices

Christie Digital Systems USA, Inc.  
Cypress  
ph: 714 236 8610

Christie Digital Systems Canada Inc.  
Kitchener  
ph: 519 744 8005

## Worldwide offices

Australia  
ph: +61 (0) 7 3624 4888

Brazil  
ph: +55 (11) 2548 4753

China (Beijing)  
ph: +86 10 6561 0240

China (Shanghai)  
ph: +86 21 6278 7708

France  
ph: +33 (0) 1 41 21 44 04

Germany  
ph: +49 2161 664540

India  
ph: +91 (080) 6708 9999

Japan (Tokyo)  
ph: 81 3 3599 7481

Korea (Seoul)  
ph: +82 2 702 1601

Mexico  
ph: +52 55-4744-1790

Republic of South Africa  
ph: +27 (0) 11 510 0094

Russian Federation and Eastern Europe  
ph: +36 (0) 1 47 48 100

Singapore  
ph: +65 6877 8737

Spain  
ph: +34 91 633 9990

United Arab Emirates  
ph: +971 4 3206688

United Kingdom  
ph: +44 (0) 118 977 8000


United States (Arizona)  
ph: 602 943 5700

United States (New York)  
ph: 646 779 2014


## Independent sales consultant offices

Italy  
ph: +39 (0) 2 9902 1161

## Front of panel

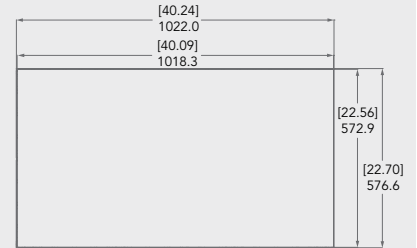

## Back of panel

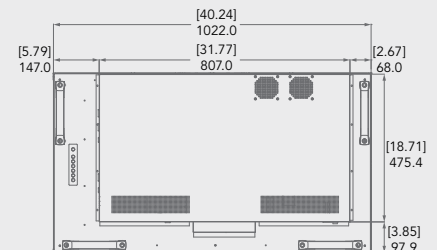


## Top of panel




## Bottom of panel



## Quick access mount



## Thin profile mount



▲ Complies with U.S. ADA regulations for installed depth under 4"



For the most current specification information, please visit [www.christiedigital.com](http://www.christiedigital.com)