

CP2230

Large-screen auditoriums | Event cinema | Post production

Lowest upfront investment for DCI-compliant cinema on screens up to 86 feet wide



Key features:

- › **Easy to operate** – touch panel, or web-based GUI. Optional Intelligent lens system (ILS™) for fast-set-up
- › **Flexibility of brightness** – Operates with standard 2kW up to high performance 6kW lamp
- › **Brightest picture** – delivers the highest lamp brightness for the longest duration
- › **Affordable performance** – Christie Xenolite long-life, lower power-consumption lamps
- › **Future-proof** – can be upgraded in the field to native 4K
- › **Reliability** – split power operation for use with UPS

2K TO 4K [↗](#) UPGRADE

Transform 2K into a superior 4K cinematic experience

CHRISTIE [↗](#) XENOLITE

Industry's longest warranted and most reliable lamps - 99.999% uptime

DIGITAL CINEMA [↗](#) CONFIGURATOR

Help find the right lamp for your projector on our website



Specifications


Christie CP2230

Brightness ¹	nominal	• 33,000 lumens
	screen size	• 86' screen ¹
	lamp	<ul style="list-style-type: none"> • 2.0kW (CDXL-20) 003-000598-01 • 3.0kW (CDXL-30) 003-000599-01 • 4.0kW (CDXL-45) 003-000600-XX • 6.0kW (CDXL-60) 003-000601-XX • 6.0kW (CDXL-60UP) 003-006912-01
Contrast ratio		• >2000:1 full field on/off
Supported frame rates		<ul style="list-style-type: none"> • 2D up to 120 fps • 3D up to 60 fps/eye
Digital micromirror device		<ul style="list-style-type: none"> • 1.2" 2K 3-chip DMD DLP Cinema® • 2048 x 1080 pixels • Upgradeable to 1.38" 4K (4096 x 2160 pixels)
Number of colors		• 35.2 trillion
Lenses		• HB and HC: 1.0:1 (HB lens) / 1.25-1.83:1 / 1.45-2.05:1 / 1.60-2.40:1 / 1.80-3.0:1 / 2.15-3.60:1 / 3.0-4.30:1 (HB lens)
Power input requirements		• Main Input (Head Only): 200-240VAC @ 50-60Hz 6A max
Power consumption		• 8800W max
Lamp power supply		• 7.0 kW low-ripple switch mode power supply
Weight		<ul style="list-style-type: none"> • As installed: 245lbs max (111kg) • Lamp power supply: 70lbs max (32kg)
Dimensions (LxWxH)		• 47.2 x 25.4 x 18.9" (1199 x 644 x 480mm)
Accessories		<ul style="list-style-type: none"> • Lamp power supply kit 7.5m • Lamp power supply kit 15m • Lamp power supply kit 30m • Rack mount stand • Nema-L6 30A 250V male PWR plug w/1.5m cord


¹ Maximum screen size depends upon various factors such as screen gain, lamp age, geometry, etc. Consult your Christie representative for detailed analysis. Measured at screen center.

Supports 3rd party IMB models from Dolby, GDC and others. Please contact Christie for updated compatibility list.


Front view




Side view

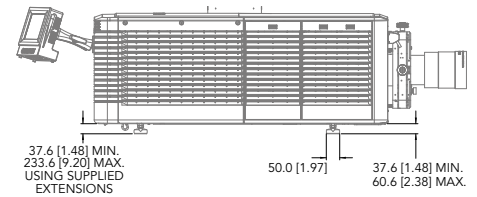

Top view

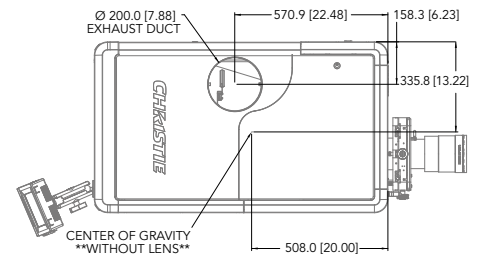

Side view

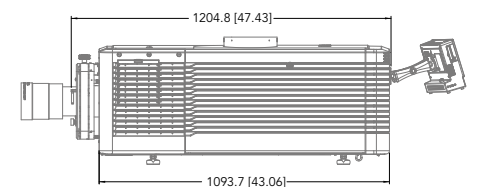

Corporate offices

Christie Digital Systems USA, Inc.
Cypress
PH: +1 714-236-8610
Christie Digital Systems Canada
Inc.
Kitchener
PH: +1 519-744-8005

Worldwide offices

Australia
PH: +61 (0) 7 3624 4888
Brazil
PH: +55 11 3181-2952
China (Beijing)
PH: +86 10 6561 0240
China (Shanghai)
PH: +86 21 6030 0500

China (Shenzhen)
PH: +86 755 3680 7000
Colombia
PH: +57 (315) 652-9620
Germany
PH: +49 221 99 512-0
India
PH: +91 (080) 6708 9999

Mexico
PH: +52 (55) 4744-1791
Singapore
PH: +65 6877 8737
South Korea
PH: +82 2 702 1601
Spain
PH: +34 (0) 91 633 99 90

United Arab Emirates
PH: +971 (0) 4 503 6800
United Kingdom
PH: +44 (0) 118 977 8000
United States (Arizona)
PH: +1 602-943-5700
United States (Texas)
PH: +1 469-757-4420

For the most current specification information, please visit christiedigital.com

Copyright 2023 Christie Digital Systems USA, Inc. All rights reserved. Our centers of excellence for manufacturing in Kitchener, Ontario, Canada and in Shenzhen, China are ISO 9001:2015 Quality Management System-certified. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. "Christie" is a trademark of Christie Digital Systems USA, Inc., registered in the United States of America and certain other countries. DLP® and the DLP logo are registered trademarks of Texas Instruments. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.
CD3857-CINE0101-CP2230-Datasheet-Feb-24-EN

